

# Cotton Fiber Grinding & Blending Wheels

Manufactured with our signature abrasive materials, these Type 27 wheels are designed for grinding and blending in one step.

## METALS

Stainless steel - Aluminum - Exotic metals - Mild steel - Brass

## PRODUCT FEATURES

- Grind and finish in one step
- Smooth, controlled grinding action
- Non-loading on aluminum
- Superior surface finishing on stainless steel and aluminum
- Long life and durability

## SPECIFICATIONS

### Grain Type

- A: Aluminum oxide
- C: Silicon carbide

### Grain Size

- 24, 36: Coarse
- 54, 80: Medium

### Bonds



**GFX: Blending:** Flexible synthetic latex bond used for blending and finishing applications. It resists loading on aluminum and is resilient for a smooth, chatter-free operation on tanks, vessels, kitchen and food processing equipment, trailers, and other fabrications.

**MTX: Grinding:** Tough resin bond used for light or medium weld removal. The resin bond provides a faster cut rate. It also resists loading on aluminum and offers excellent results on all non-ferrous materials.

## AVAILABILITY

DIAMETER	THICKNESS	ARBOR HOLES	MAX RPM
4	1/8, 3/16, 1/4	5/8	15,300
4-1/2	1/8, 3/16, 1/4	7/8	13,300
5	3/16, 1/4	7/8	12,200
6	3/16*, 1/4	7/8	10,100
7	3/16*, 1/4	7/8	8,500
9	3/16*, 1/4	7/8	6,600

\*Available in GFX only  
Available with 5/8 - 11 throw away adapters.

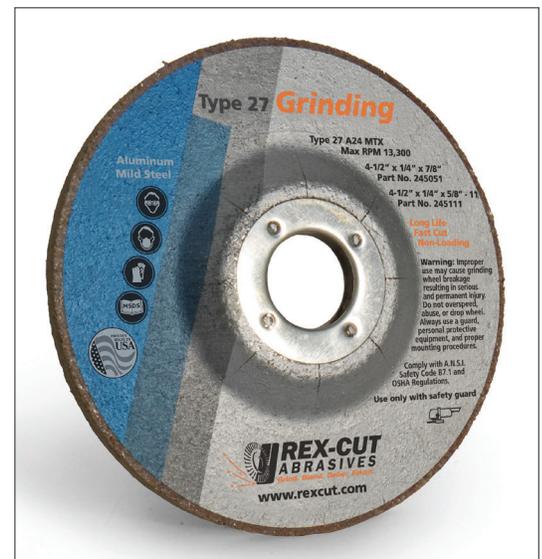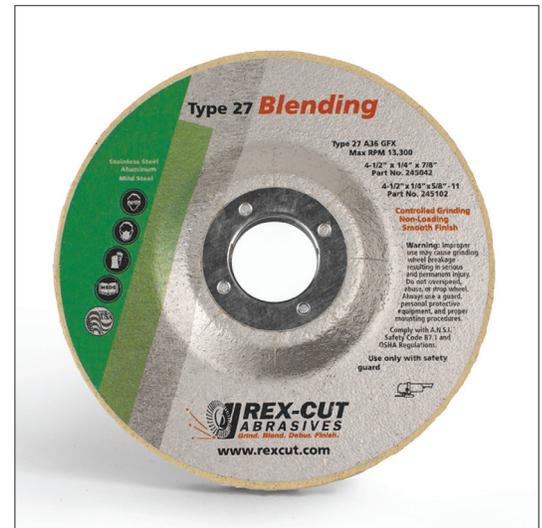

Angle Grinder

MADE IN  
USA

800-225-8182  
www.rexcut.com  
info@rexcut.com

youtube.com/user/rexcutabrasives  
twitter.com/rexcut  
linkedin.com/company/rexcut  
facebook.com/rexcut

**an employee owned company**



Improve Your Daily Grind